



Cognito Ball Joint SM Series Upper Control Arm Kit for 2007-2018 GM 1500 2WD/4WD Trucks and SUV with Cast Steel Control Arms

**INSTALL INSTRUCTIONS:**

Cognito Ball Joint SM Series Upper Control Arm Kit for 2014-2018  
GM 1500 2WD/4WD Trucks and SUV with Cast Steel Control Arms  
SKU: 110-90295

**PARTS LIST FOR SKU: 110-90295**

QUANTITY	PART #	DESCRIPTION
1	<b>80034</b>	Ball Joint Upper Control Arm Assembly, Driver
1	<b>80035</b>	Ball Joint Upper Control Arm Assembly, Passenger
2	199-90722	Ball Joint, Bolt-In
1	<b>HP9047-1</b>	Bolt-in Ball Joint Upper Control Arm Hardware Pack

**PARTS LIST FOR SKU: 80034**

QUANTITY	PART #	DESCRIPTION
1	8187	Ball Joint UCA Weldment, Driver
2	6878	Pivot Bushing Assembly

**PARTS LIST FOR SKU: 80035**

QUANTITY	PART #	DESCRIPTION
1	8188	Ball Joint UCA Weldment, Driver
2	6878	Pivot Bushing Assembly

**PARTS LIST FOR SKU: HP9047-1**

QUANTITY	PART #	DESCRIPTION
4	HARDWARE-33078	1/4" Flat Washer
2	HARDWARE-37260	1/4"-20 Lock Nut
16	HARDWARE-33080	5/16" Flat Washer
8	HARDWARE-37262	5/16"-18 Lock Nut
6	HARDWARE-33086	1/2" Flat Washers
4	HARDWARE-58792	1/4"-28 90-degree Zerk Grease Fittings
6	HARDWARE-63124	6" Black Cable Tie
2	HARDWARE-13003	1/4"-20 x 0.75" Bolt
8	HARDWARE-15057	5/16"-18 x 1.25" Bolt

**WARNING**

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools, and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.



## INTRODUCTION

The Cognito Ball Joint SM Series Upper Control Arm Kit is a direct replacement for the factory aluminum or stamped steel upper control arms (UCAs). The Cognito UCA kit will add performance to your Chevrolet and GMC truck by adding caster and correcting the ball joint angle for lifted and leveled applications. The allowable droop travel is also improved with the design of these arms. The Cognito UCA kit can be used with a Cognito spindle replacement lift kit. Designed and made in the USA.

## TECHNICAL INFORMATION

- Installation requires a qualified mechanic.
- Always wear safety glasses when using power tools.
- When a lift is required to perform the installation of these products and always ensure the vehicle is properly supported before attempting installation or serious injury may occur.
- Cutting off the service perch on the frame under the front upper arm pivot is required.
- The stock wheel and tire will fit with this UCA kit. Using a tire larger than the factory tires on the factory wheels will result in interference issues (rubbing, damage, noises, etc.)

## REQUIREMENTS

- Read instructions carefully and study the pictures before attempting installation.
- Check the parts and hardware packages against the parts list to assure that your kit is complete.
- Work through these instructions on both sides of vehicle at the same time to completion. The order of the steps is important.
- Shocks or spacers offered by Cognito only are supported for application with this product.


1. Support the lower control arms with a floor jack or stand prior to removing the upper control arms (UCAs).
2. Loosen the ball joint nut of the upper control arm until you can spin the nut with your fingers, but do not fully remove it. Use a pickle fork to separate the ball joint from the spindle or tap on the side of the spindle next to the ball joint stud with a hammer. When the tapered seat of the ball joint breaks loose, you may then remove the ball joint nut, and separate the factory upper control arms from the spindles.
3. Remove the factory bolts and eccentric washers connecting the UCA to the frame. Pay attention to the orientation in which they were removed and place the hardware safely aside. These bolts need to be re-installed in the same orientation and location.
4. After removing the UCA, locate a cutting tool (such as a reciprocating saw) and cut both the driver and passenger side service perch, see Figure 1 and Figure 2.

**Note:**

***Warranty on Cognito products will be void if damage occurs due to collision with the factory service perch and/or shock tower.***

Use safety gear (face shield, safety glasses, gloves, etc.) and make sure all brake lines and wires are clear of cutting area. Exposed raw metal should be coated or painted to prevent corrosion.

**Figure 1: Factory Frame Service Perch Removal - Before**

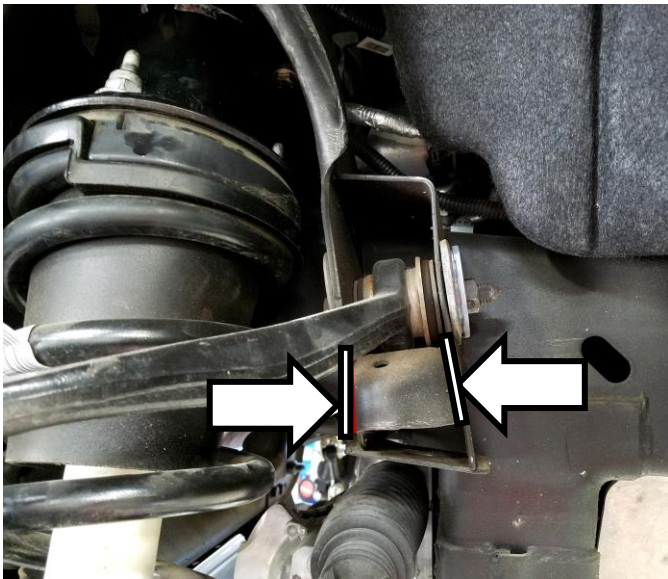

**Figure 2: Factory Frame Service Perch Removal - After**




5. In order to prevent the UCA from coming into contact with the frame, the front edge of the shock tower must also be cut and trimmed, see Figure 3.

**Note:**

The vertical cut is in line with the front of the UCA pocket. The horizontal cut is in line with the top of the UCA pocket.

***Warranty on Cognito products will be void if damage occurs due to collision with the factory service perch and/or shock tower.***

Use safety gear (face shield, safety glasses, gloves, etc.) and make sure all brake lines and wires are clear of cutting area. Exposed raw metal should be coated or painted to prevent corrosion.

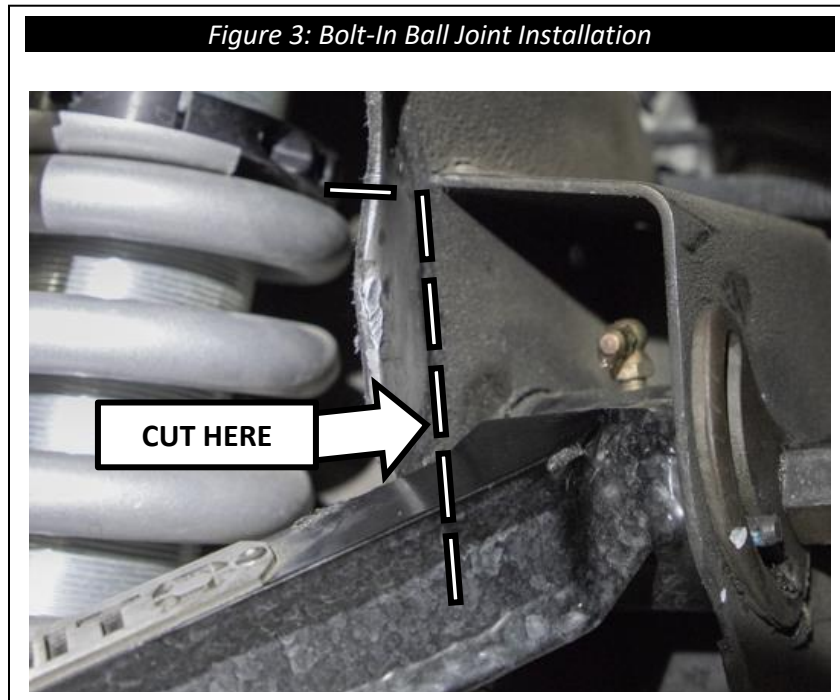

6. Locate the driver side **80034** Cognito Ball Joint UCA, **199-90722** Cognito Bolt-In Ball Joint, and **HP9047-1**. Locate the four (4) 5/16" bolts and apply anti-seize (not included) to the threads. Using the 5/16" bolts, flat washers, and locknuts, mount the supplied ball joint to the bottom of the UCA, see Figure 4. Torque the hardware to 22 ft-lbs. using a torque wrench.

**Note:**

**HP9047-1** includes hardware that will not be used with this kit. The following hardware will be leftover with your Cognito UCA kit (see Figure 5),

- 90-Degree Zerk Grease Fittings, Qty 4

Figure 4: Bolt-in Ball Joint Installation

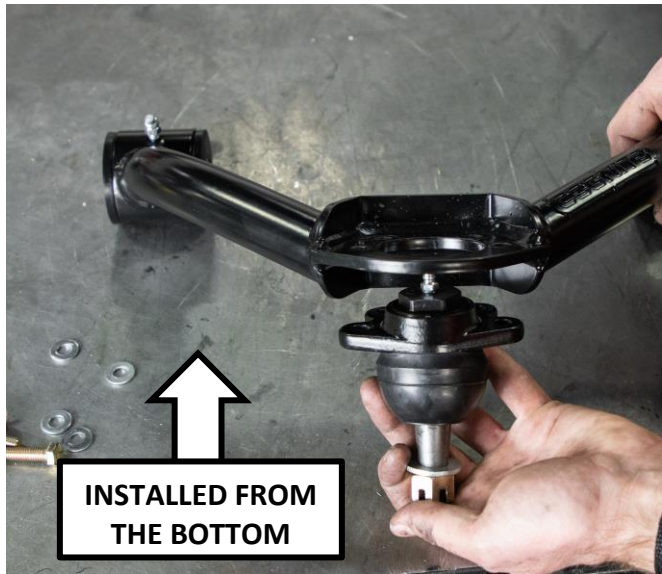


Figure 5: Unused Hardware in HP9047-1



7. With the bolt-in ball joint secured to the UCA, mount the Cognito UCA to the frame using the factory bolts, nuts, and eccentric washers as previously removed. Torque the hardware to 90 ft-lbs.
8. Mount the ball joint to the spindle using the flat washer and castle nut provided on the ball joint. Torque the castle nut no more than 65 ft-lbs. while ensuring that the cotter pin hole lines up with one of the castle nut's notches. Insert the cotter pin into the pin and bend the ends around the nut to secure it in place.

**Note:**

The small end of the spindle's tapered hole may need to be reamed with a 9/16" drill bit. The factory ball joint is metric, and the aftermarket ball joint is imperial.

9. If there were factory lines mounted to the factory UCA such as ABS or brake lines, they must be restrained to avoid binding and contact with any moving parts of the vehicle. Use the 1/4" hardware provided within **HP9047-1** to fasten the factory brake line bracket to the Cognito UCA. If necessary, slide the brake line through the bracket to obtain a suitable mounting situation. Use the small tabs on the control arms to restrain the ABS line as needed.
10. If extra length is needed for the ABS line, remove the ABS line clip from the top of the frame shock pocket and use the cable ties to restrain the ABS line to the brake line and the tabs as needed.
11. Repeat the steps above to install the Cognito UCA onto the opposite side of the vehicle.
12. Ensure that all bolts are properly torqued. Ensure there are no rubbing or loose cables anywhere after the Cognito UCA installation. Use cable ties to restrain any cables from interfering with any other part. Check that all lines are free of stress or interference while the vehicle is in full droop, full bump, and throughout the complete steering cycle.



13. Install front wheels and tires and torque lug nuts to factory manufacturer's specifications.
14. Adjust headlights per owner's manual.
15. **Have the vehicle professionally aligned.**

**Note:**

Some Cognito upper control arms have added caster built into them to increase drivability performance, therefore it's important to be sure the correct control arm is installed on the correct side of the vehicle. It's also important to make your alignment shop aware that if caster is high, that is the intention by design.

Cross caster is important in making your vehicle track straight down the road. Most roads have crown to them, high in the middle for water runoff. This crown will make your vehicle want to pull to the right. Vehicles with stock tires on them have a narrow contact patch on the ground and are not as affected as a vehicle having larger wider tires. With larger wider tires it's important to have cross caster proper in order for the vehicle to track straight on these roads. Trucks with dual rear wheels have more tire on the ground and require more cross caster. The length of the wheelbase will also affect cross caster needed.

Generally, crew cab short and long bed trucks like .8 degrees of cross caster. For example, the driver side would have 2° while the passenger side would have 2.8° of caster. Dual rear wheel trucks like .9-1.0 degrees of cross caster. Your area might have roads that are crowned more or less than average therefore these numbers may need to change, and your alignment shop should understand this. If your alignment tech is stating they can't align the truck, that typically means they can't get the alignment to OEM spec, and that's fine because your vehicle is no longer OEM. A good tech will understand this and the numbers and let caster run slightly out of OEM spec (Caster should always be above 2 degrees positive) while maintaining cross caster needed for the vehicle and roads so you enjoy your vehicle with aftermarket Cognito parts and your driving experience. Camber should always be from  $-1.1^{\circ}$  to  $+1.1^{\circ}$  and toe should always be .125" to .250" toe in for best tire wear.



## WARRANTY / RETURN POLICY / SAFETY

### Cognito Limited Lifetime Warranty

Cognito Motorsports, Inc. hereinafter "Cognito," warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on "competition" vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito's obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are "consumables" and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warranted separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

### Return Policy

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

### Product Safety Advisory

The installation of Cognito steering and suspension components will modify your vehicle's original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle's frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle's susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle's ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle's suspension components and tires.